

## Product Bulletin


# LIFI™ Entertainment 30 Series

Optimized lighting solution for event and architectural lighting



- Up to 12,000 lumens
- Forward emitting intensity pattern
- Useful lifetime more than 6 times longer than conventional lamps
- High Color Rendering Index (CRI) up to 93
- Rugged and impact resistant
- Small form-factor
- Digitally controlled for fast dimming
- Operates in all orientation


Ideal for moving heads and high intensity spot lighting

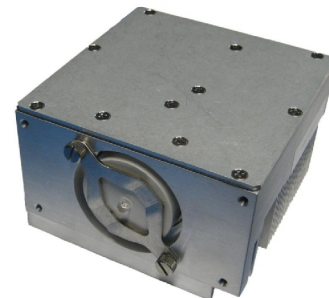


## LIFI™ Entertainment Typical Product Data at-a-Glance

Ordering Code	LIFI-ENT-30-01
Length (mm)	103
Width (mm)	103
Height (mm)	67
Enclosure Finish	Natural aluminum
Rated Life (hours)	20,000
Total Initial Lumens	12000
Turn-on time (sec.)	<20
Lumen Maintenance at Life (%)	50
CCT(K)	7500
CRI	91
Dimming Range (%)	20-100
Nominal Power Use (W)	230
Input Voltage	28
Input Current (A)	8.2
Intensity Distribution	Forward Emitting

### LIFI™ Dimensions (mm)

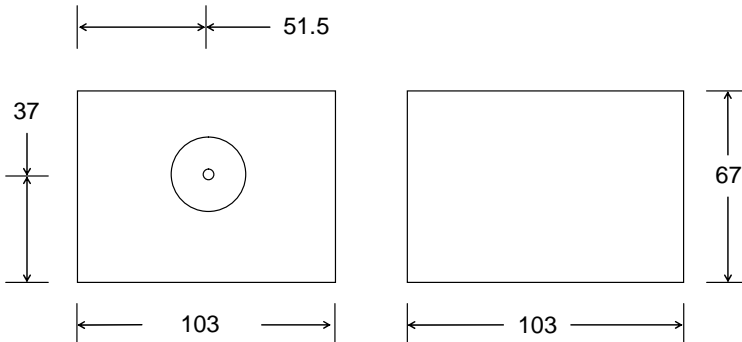

### Spectral Power Distribution

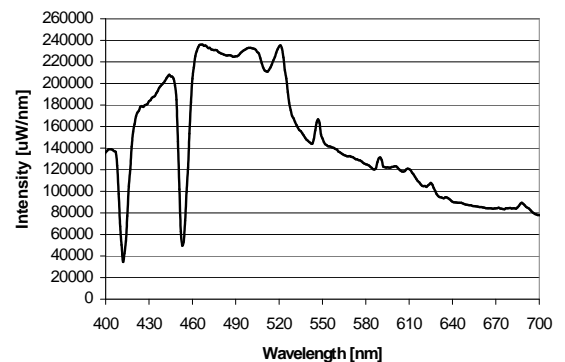

### Operating Instructions:

Product is designed for use with forced air cooling

### LUXIM Corporation

1171 Borregas Avenue  
Sunnyvale, CA 94089  
tel: +1-408-734-1096  
email: [info@LUXIM.com](mailto:info@LUXIM.com)  
Printed in USA 6/08

[www.LUXIM.com](http://www.LUXIM.com) • [www.LIFI.com](http://www.LIFI.com)